

20. 10. 2004

**Europäisches  
Patentamt****European  
Patent Office****Office européen  
des brevets**

REC'D 19 NOV 2004

WIPO

PCT

**Bescheinigung****Certificate****Attestation**

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

**Patentanmeldung Nr.    Patent application No.    Demande de brevet n°**

03024398.4

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk****BEST AVAILABLE COPY**



Anmeldung Nr:  
Application no.: 03024398.4  
Demande no:

Anmeldetag:  
Date of filing: 24.10.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

3M Espe AG  
Espe Platz  
82229 Seefeld  
ALLEMAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Device for storing and dispensing a flowable substance

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

A61C/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

New EP Patent Application  
3M-ESPE AG  
u.Z.: H2720 EP

EPO - Munich  
80

24. Okt. 2003

24. Okt. 2003

VOSSIUS & PARTNER  
PATENTANWÄLTE  
SIEBERTSTR. 4  
81675 MÜNCHEN

5

Device for storing and dispensing a flowable substance

10 The present invention relates to a device for storing and dispensing a flowable substance. In particular, the present invention relates to a device for storing and dispensing a flowable liquid being a dental substance for tooth treatment.

15 For storing and applying a small quantity of a liquid, a commercially available device includes a container in the form of a so-called "blister package". Two separate recesses are formed in a deep-drawn part of the package which is closed by a removable sheet. Upon removal of the sheet, the two container recesses are exposed so that a brush can be taken out and used to apply the liquid to the treatment site. For example, US-A-6 105 761 discloses a device for storing and dispensing quantities, particularly small quantities, of one or more flowable substances. The device comprises a pocket which is formed so as to receive an application instrument. The application instrument, which is stored in a pocket of the container or is inserted into the same by  
20 the user, may be contacted with the flowable substance without opening the container as a whole. It is only necessary to withdraw the application instrument, after it has taken up the substance, from the pocket of the container and move it to the treatment site.

25 A different example of a conventional single patient dose medicament dispenser with applicator is shown in WO 96/03326.

30 Such devices have already proven in the market as a cheap and reliable delivery system for storing, mixing, and applying of flowable liquid materials using, for example, such a brush applicator. For indications requiring a higher volume of liquid for the treatment a brush may be, however, disadvantageous because the amount of liquid which can be transferred from the package to the location of treatment is limited to the absorbability of the brush. Furthermore, once a brush is wetted with liquid, the absorbability decreases tremendously, thus becoming nearly useless for transferring further liquid.

It is an object of the present invention to provide an improved and simplified device for storing and dispensing a desired amount of a flowable substance. This object is achieved with the features of the claims.

- 5 The present invention provides a device for storing and dispensing a flowable substance comprising (i) a container comprising (1) a base member and (2) a cover member being sealingly connected with each other along the circumference of the container, (3) at least one compartment for receiving said substance, and (4) an open ended pocket area into which said substance is transferable from said at least one compartment, and (ii) a cannula having an internal  
10 passageway being in a fluid communication with said pocket for dispensing said substance.

- According to a first preferred aspect of the present invention, the cannula is a separate component having a first (rear) end and a second (front) end, said first end being associated with said open end of said pocket area. In this preferred embodiment, the cannula is, for example, a  
15 moulded part that is incorporated into, i.e., connected to said container. Preferably, the first end comprises an extension part having a portion with an increased cross-section (compared to the cross-section of the other part of the cannula). A preferred solution is thus to, for example, injection mould a cannula with a tip at one end and an extension part at the opposite end. The extension part is used for attaching the cannula tightly to the container. Preferably, the cannula is  
20 inserted into said pocket of said container in order to establish said fluid communication between said pocket and said cannula.

- Preferably, the extension part has a cross-sectional shape comprising sharp edges in the plane between the base member and the cover member, and more preferably comprises a rhombical,  
25 triangular or fin-like cross-sectional shape. This cross-sectional shape (in a plane perpendicular to the longitudinal axis of the cannula) of the extension part provides a smooth transition between the extension part and the surrounding base and cover member, and the sharp edges help to avoid hollow spaces between the base member and the cover member, because the sharp edges lay in the plane between the base and the cover member.

- 30 Alternatively, the extension part comprises at least one portion having an increased diameter. Thus, the extension part is a "plug-like" extension part comprising one or more circumferential flanges. Such a structure also avoids hollow spaces between the base member and the cover

member since the plug part of the cannula is inserted into said pocket, for example, by press fit, thus stretching the base and cover member around the extension part.

5 In accordance with a further alternative, the extension part comprises a portion being tapered along the length thereof, with the thickness of the tapered portion decreasing towards said first end. With this arrangement, fluid communication between the pocket and the cannula is provided by attaching the base member and cover member of the container onto the tapered portions or areas, respectively, on the extension part. Preferably, the tapered portion comprises an U-shaped sealing area on each of the opposing surfaces of the tapered portion; wherein the legs of the U-  
10 shaped sealing areas extend towards the first end of the cannula, i.e. towards its rear end, and are connected with each other at the edge of the first end. Thus, the two sealing areas are connected with each other and thus extend from one side of the tapered portion to the other side. A passageway is thus formed at one side of the extension part, starting at the edge of the extension part, i.e., between the legs of the "U", and extending towards the bottom of the "U" at that side  
15 where the internal passageway of the cannula is accessible.

It is preferred in all alternative embodiments that the first end of the cannula is attached to said open ended pocket by means of a heat seal, a press fit, and/or an adhesive.

20 According to a second aspect of the present invention, the cannula is integrally formed with said base member. In other words, the base member and the cannula are provided as a single component of the container, so that the pocket area is a part of the integrally formed cannula.

25 According to a third aspect of the present invention, the cannula is attached to the cover member, whereby fluid communication is established through the cover member. This aspect is advantageous because the cannula can be attached to the cover member prior to the assembly of the whole device, thus being attached at an early stage of the manufacturing process. According to a first preferred embodiment of the third aspect of the present invention, the cover member is closed to the internal passageway of the cannula in order to properly seal the container. For this  
30 reason, a punching member is accommodated in the passageway of the cannula in order to punch the cover member prior to use of the device. Alternatively, a hole or slit is cut into the cover member during the manufacturing process. A slit is preferred since there is no risk that material cut out of the cover member remains in the interior of the container.

As an option for all aspects of the present invention, the cannula comprises a dosing means, preferably having a variable or flexible volume, like a bellow, to squeeze the substance out of the cannula. The dosing means is preferably attached to the cover member, and a passageway between the dosing means and the pocket area is established prior to use, for example, by means of a punching member. Alternatively, a cartridge with a piston is provided.

According to a preferred embodiment of the present invention, the cannula further comprises an applicator at the second (front) end of the cannula for applying the substance to a target or treatment area. Preferably, the applicator comprises bristles that are (preferably integrally) formed at the second end of the cannula to form a brush for applying dispensed material. In case the bristles are integrally formed with the cannula tip, it is possible to mould the bristles and to stretch the bristles within the injection moulding tool during mould opening. Alternatively, the applicator comprises a foamed material (like a sponge), a non-woven material, or a plurality of fibres (like a felt-tip pen) integrated into the second end of the cannula. The sponge is preferably an open-porous sponge, e.g., made of polyethylene. Such a sponge could easily be sealed within the device. The use of a felt-tip pen-like applicator tip is advantageous due to its stiffness compared to bristles. Moreover, the sealing of the entire device would be facilitated compared to the use of bristles.

In order to avoid foaming or too rapid flow of the liquid through the cannula (for example owing to a sudden activation of the device), the internal passageway of the cannula preferably comprises flow resistors, for example formed by structured surfaces, constricted portions, and/or orifices.

According to a further preferred embodiment, the extension part further comprises stiffening elements, preferably extending away from said extension part. Most preferably, the stiffening elements extend beyond the first end of and away from the cannula, like feelers. Alternatively, or in addition, the base member is strengthened or stiffened by a stiffening structure.

The extension part is preferably formed such that the opening of the internal passageway of the cannula opens at a side surface of the extension part, i.e., offset from the longitudinal axis of the cannula. Such an arrangement of the passageway opening is advantageous for the manufacturing process because it facilitates ejection of the cannula from the mould.

According to a preferred embodiment, grooves are provided in the surface at which the passageway opening is located. The grooves extend from the passageway opening towards the end of the cannula, and provide flow channels between the pocket area and the passageway.

- 5 In all aspects of the present invention, it is preferred that the base member is formed as a sheet. Preferably, the base member sheet is a deep-drawn sheet formed of a polypropylene layer, an aluminum layer, and a polyethylene layer. It is also preferred that the cover member is formed as a sheet, and is preferably formed of a polyethylene terephthalate layer, an aluminum layer, and a polyethylene layer. In both sheets, a polyethylene terephthalate layer may be provided between  
10 the aluminium layer and polyethylene layers. The sheets used are such that they act as a diffusion barrier with respect to the substance to be received in the compartment. Both of the sheets are preferably flexible, which is useful in that the container, being made of just two flexible sheets, is inexpensive in terms of material and manufacture. Using suitable sheets will safely avoid any diffusion of the compartment content. Thus, the sheet package may be used without any further  
15 envelope as a primary package which allows clear marking due to its flat and relatively large-area shape. The separation between the compartment containing the flowable substance and the pocket receiving the cannula is preferably achieved by mutual adherence of the two sheets. The adherence may be created simultaneously with the sealing of the compartment upon filling.
- 20 The cover member is alternatively formed as a plastic part, preferably as an injection moulded part that has the same shape like the punching contour of the base member in order to achieve an improved stiffness, and to improve the entire handling of the device. If in this case a two- or multi-component base member is used, the plastic part forming the cover member needs to be foldable between the two compartments, for example by a line of weakness forming a hinge. It is  
25 preferred that additional locking means (for example brackets or clips) are provided that prevent that the folded plastic part is unfolded again after mixing and dispensing of the substance. In order to reduce the tendency to fold back, the used material preferably comprises wax components.
- 30 Such locking means are also preferred for the other embodiments in case materials are used for the base member and cover member having a certain inherent return movement tendency.

The material used for the base and cover sheets as well as for the injection moulded part preferably comprises COC (cyclo olefin copolymer) in order to optimise the barrier properties,

i.e. the storage stability. Furthermore, barrier coatings are preferably used, such as metallizing (a coat of vaporized material), or anorganic-organic hybrid polymers.

5 The sheets of moulded parts are preferably adapted to block light of a particular wavelength range, and are otherwise transparent. For example, materials are used that block light in the range of 300 to 500 nm (blue light).

10 In a preferred embodiment, the device further comprises a portion separating said compartment from said pocket, said separating portion comprising a passage area adapted to be selectively opened by pressure effective on said passage area for placing said compartment in communication with said pocket. In the device of the present invention, the flowable substance, which may be a liquid or a powder, is made accessible without requiring any tool, by selectively opening the passage area, whereby the substance contained in the compartment is transferred to the pocket for dispensing. The structure of the invention acts as a metering device for dispensing and applying quantities of the substance which are determined by the volume of the compartment.

20 In a further preferred embodiment of the present invention, the device further comprises two compartments for holding different substances, and a passage area adapted to be selectively opened for placing said compartments in communication with each other. This arrangement is specifically suited for substances to be mixed from components which react with each other. A zone of reduced lateral width may be provided between the compartments to facilitate the compartment which is emptied first to be bent upon the second compartment, thereby preventing the substance from flowing back into the first compartment.

25 In case two or more compartments are present, the device is activated as follows. First, the passage area between the compartments is opened so that the compartments can communicate with each other. During mixing of the substances contained in the compartments, the separation portion separating the pocket from the compartments is still closed. Only upon proper mixing of the substances, the passage area of separating portion is finally opened so that the resulting substance can be dispensed.

It is to be noted here that typical applications require two- or multi-component devices so that typically devices having two or even more compartments are used. Usually, it is intended to



separate the individual substances or components from each other since they may undergo an undesired chemical reaction. The components are brought in contact and mixed with each other only immediately prior to dispensing. However, the present invention is not limited to a two- or multi-component dispensing device.

5

A plurality of juxtaposed units may be formed in the sheets, each unit including a container and a cannula, the units being inter-connected along tear-off lines. This embodiment results in a further simplification of the storage.

- 10 Preferably, the container is prefilled. Further preferably, the container is part of a set that also comprises a separate applicator like a brush. As a further preferred option, the different juxtaposed units comprise different substances.

- In accordance with a further preferred embodiment of the present invention, the cannula  
15 comprises mixing means. In a first alternative, the mixing means are mixing elements that provide a static mixer, for example mixing helixes or elements providing flow resistance; these cause a mixing of the substances by swirl or turbulence. The elements providing flow resistance are preferably formed in the form of protrusions or indentations on the inner surface of the cannula (i.e., in the flow channel). These are preferably formed by embossing, coating, cutting or  
20 the like. According to a further alternative, the flow passage through the cannula is meandering, i.e., the direction of flow changes along the length of the cannula.

The present invention is now described with reference to the accompanying drawings, in which:

- 25 Fig. 1 shows a preferred embodiment of the device according to the present invention comprising two compartments for containing substances, and an incorporated cannula;  
Fig. 2A shows an alternative embodiment of the device according to the present invention comprising a single compartment and an integrally formed cannula;  
Fig. 2B shows a further alternative embodiment of the device according to the present invention comprising two compartments and an integrally formed cannula;  
30 Fig. 3 shows the embodiment of Fig. 1 prior to insertion of the cannula with its extension part into the pocket of the device;  
Fig. 4 shows a preferred cross-sectional structure of the extension part of the cannula;  
Fig. 5 shows a further preferred cross-sectional structure of the extension part of the cannula;

- Fig. 6A shows an alternative cross-sectional structure of the extension part of the cannula;  
 Fig. 6B shows a top view of the cannula with its extension part shown in Fig. 6A;  
 Fig. 7 shows a further alternative structure of the extension part of the cannula;  
 Fig. 8 shows a further alternative structure of the extension part of the cannula;  
 5 Fig. 9 shows a further aspect of the device according to the present invention with the cannula attached to the cover member of the device;  
 Fig. 10 shows a preferred embodiment of the device according to the present invention comprising a dosing means;  
 Fig. 11 shows an alternative embodiment of the device according to the present invention  
 10 comprising a handle;  
 Fig. 12 shows a preferred embodiment of the device according to the present invention, wherein the extension part of the cannula comprises stiffening means;  
 Fig. 13 shows in detail the internal passageway opening at the extension part;  
 Fig. 14 shows a preferred embodiment of the device according to the present invention wherein  
 15 the second end of the cannula comprises bristles; and  
 Fig. 15 shows a cross-sectional view of the application bristles at the second end of the cannula.

The storage and application device according to a first preferred aspect of the present invention  
 20 is shown in Figs 1 and 3. The device 1 comprises a container 10 that is in this preferred embodiment formed by a deep-drawn sheet 11 and a cover sheet 12 (cover sheet 12 is shown, for example, in Figs 4 and 5). Sheet 11 comprises two cushion-shaped compartments 14<sub>1</sub> and 14<sub>2</sub> holding a supply of two different flowable substances. Adjacent to the area containing the compartments, a pocket 15 is provided for receiving a cannula 13, in particular an extension part  
 25 16 of cannula 13.

Fig. 3 shows cannula 13 with extension part 16 prior to its insertion into pocket 15 of device 1.  
 Fig. 1 shows the assembled storage and application device 1.

30 The cannula 13 comprises an internal passageway that allows liquid to be dispensed from the compartments 14<sub>1</sub>, 14<sub>2</sub> through the cannula onto a treatment area. The extension part 16 provided at a first end of cannula 13 provides a tight connection between the cannula and the container 10 of device 1.

Tight mutual connection of the sheets 11 and 12, i.e. the base member and the cover member, is preferably achieved by heat sealing or gluing.

According to an alternative aspect of the present invention, device 1' comprises a container 10' that is formed by base member 11' and a cover member, as shown in Figs 2A and 2B. According to this aspect of the present invention, the cannula 13' is integrally formed with the base member 11', i.e. the cannula 13' is not a separate component that is added to the container 10' at some point of assembly, but forms an elongate extension of the channel-like pocket area 15'.

According to Fig. 2A, the container 10' comprises a single compartment 14' only. Alternatively, as shown in Fig. 2B, two compartments 14<sub>1</sub>' and 14<sub>2</sub>' can be provided for containing different substances.

In order to achieve a tight seal not only between the base member and the cover member, i.e. the two sheets, but also in the pocket area where cannula 13 is incorporated into device 1, the extension member 16 comprises an increased cross-section, as shown in Figs 4 through 8.

According to a first alternative design, the extension part 16 comprises a rhombical cross-section (see Fig. 4). This increased cross-sectional portion of cannula 13 (with internal passageway 17) is finally accommodated between base member 11 and cover member 12.

Fig. 5 shows a different embodiment of extension part 16. According to Fig. 5, extension part 16 has an increased cross-sectional area in the form of a semi-rhombus (compared to Fig. 4), or triangle, respectively. Extension part 16 is tightly accommodated between base member 11 and cover member 12.

In order to further improve the tight seal in this area, the extension part 16 comprises fins 18 with sharp edges in the plane between the base member 11 and the cover member 12 (see Figs 6A and 6B). With these sharp edges, hollow spaces between the two sheets forming the base member and the cover member and the extension part of the cannula are avoided. It is clear to the skilled person that sharp edges in order to avoid hollow spaces can also be provided with cross-sectional shapes as shown in Figs. 4 and 5, for example.

According to an alternative embodiment, as shown in Fig. 7, the extension part 16' of cannula 13' is formed like a plug containing one or more circumferential flanges 19'. Hollow spaces between the cannula and its extension part and the base member/cover member are avoided by inserting the plug-part of the cannula into the pocket area by press-fit such stretching the base member and cover member sheets around the plug. Optionally, an additional hot sealing step or gluing step (for example hot melt glue) can be applied.

A further preferred embodiment of the extension part is shown in Fig. 8. In this embodiment, the extension part 16'' has an approximately triangular cross-section in the transition area between the tubular cannula portion 13'' and the extension part 16''. However, towards the edge or tip of the extension part 16'', the extension part 16'' comprises a portion that is tapered along the length thereof. Due to the triangular cross-section, and the taper towards the end of the extension part, the resulting surface of the extension part is approximately triangularly shaped, as is clearly shown in the top left drawing of Fig. 8.

On the other side of the extension part (as shown in the top right drawing of Fig. 8), the internal passageway 17'' of cannula 13'' is exposed to the exterior of the cannula that an open passageway 22'' is formed.

Both the upper side and the lower side of extension part 16'' comprise a U-shaped sealing area, i.e. upper sealing area 20'' and lower sealing area 21''. The legs of these U-shaped sealing areas 20'' and 21'' extend towards the end of the extension part and are connected to each other at the edge of the end of the extension part 16'', thus forming a continuous sealing area.

Thus, a smooth and tight transition between the flat interior of the container and the tubular cannula is provided.

According to a further aspect of the present invention as shown in Fig. 9, device 100 comprises container 110 formed by base member 111 and cover member 112. Two compartments 114<sub>1</sub> and 114<sub>2</sub> are formed, containing, for example, substance 123 in compartment 114<sub>1</sub>. In this embodiment, cannula 113 is attached to the cover member 112 of the container 110. This embodiment is advantageous because the cannula can be attached to the cover member sheet prior to assembly of the entire container and is thus attached to the cover member at an early

stage in the manufacturing process. The cover member 112 is either pre-cut to establish a passageway, or is punched through the cannula prior to use of the device.

5 As an option, cannula 113 is provided with a separate dosing means 124' (see Fig. 10). The dosing means 124' preferably comprises a flexible volume to squeeze out the substance, or may even be provided in the form of a cartridge with a piston.

10 A further preferred option of the storage and application device according to the present invention is shown in Fig. 11. In this embodiment, the cover member 12 is a plastic part, for example an injection moulded part that has the same shape like the punching contour of the base member in order to achieve an improved stiffness, and to improve the entire handling of the device. If in this case a two- or multi-component base member is used, the plastic part forming the cover member needs to be foldable between the two compartments, for example by a line of weakness forming a hinge. Fig. 11 shows a two-compartment device. For a two-compartment  
15 design (press-fold-press-design), the first (rear) compartment has to be surrounded by a cut, e.g., a circular 300° (270°-330°) cut to enable folding of the first compartment after being pressed. This circular cut is also shown in Fig. 11. The plastic part is then sealed against the base member within the circular cut in order to avoid leakage through the cut.

20 It is also preferred that the plastic part 25 forms the inner layer of a foil-plastic-foil sandwich design.

As shown in Fig. 11, the plastic part also preferably comprises a handle 25.

25 In order to provide a sufficient rigidity of the entire container, the base member comprises an additional strengthening or stiffening structure. Alternatively or in addition, stiffening members are included into the cannula. In the embodiment shown in Fig. 12, extension part 16 comprises stiffening members 26 that extend beyond the rear end of the extension part like feelers.

30 As shown in Fig. 13, extension part 16 is preferably formed such that the opening of the internal passageway 17 of the cannula 13 opens at a side surface of the extension part; i.e. offset from the longitudinal axis of the cannula. According to a preferred embodiment, grooves 29 are provided in the surface at which the passageway opening is located. The grooves extend from the

passageway opening towards the end of the cannula, and provide flow channels between the pocket area and the passageway.

5 In all aspect of the present invention, the cannula further comprises an applicator at its second end for applying the substance to a target or treatment area. Preferably, as shown in Fig. 14, the applicator 27 comprises bristles that are (preferably integrally) formed at the second end at the cannula to form a brush for applying dispensed material to the target or treatment area. In case the bristles are integrally formed with the cannula tip, it is possible to mould the bristles and to stretch the bristles within the injection moulding tool during mould opening. In order to facilitate  
10 injection moulding, the cross-sections of the bristles are shaped as shown in Fig. 15.

In general, the shape of the compartment 14 may be circular as shown in Figs 1 through 3 or may have any other geometric form. The pocket 15 for receiving the cannula 13 is formed as a blind whole, which, in the storing condition, is closed to the compartment 14. Compartment 14 and the  
15 pocket 15 are arranged with respect to each other preferably such that the axis defined by the pocket 16 and cannula 13 points to the centre of the compartment 14.

The separation between the compartment 14 and the pocket 15 is designed with respect to spacing and strength of adherence between the base member 11 and cover member 12 so that a  
20 pre-defined break zone is created. With a view to minimum manufacture expenditure, the sheets forming the base member and the cover member are interconnected in the pre-defined break zone by the same means as in the outer areas, e.g., by hot sealing or gluing. In case of sealing, the pre-defined break zone may be produced by using a different, specifically a lower  
25 temperature than in the outer connecting regions.

In use, the two sheets 11, 12 are separated in the predefined break zone to connect the compartment 14 with the pocket 15. This is preferably done by pressure on the cushion-shaped compartment 14, e.g., between the user's thumb and index finger. Such pressure not only opens the predefined break zone but at the same time reduces the compartment volume to cause the  
30 substance to flow into the pocket 15 through the connection thus created, thereby providing a flow of the substance into the internal passageway of cannula 13.

The device described above is particularly suitable for storing and dispensing small liquid quantities, such as dental substances which are required for a single application in amounts of

few tenths of a millilitre. In such a case, the compartment 14 has a diameter of 10 to 15 mm in the embodiment shown, and the cannula 13 has a diameter of, e.g., > 2 mm at the fixed end and approximately 0.8 mm at the second end.

- 5 In case a two- or multi-component device is used, the two or more compartments are separated from each other by a pre-defined break zone in a manner similar to the separation between the compartment 14 and the pocket 15. In use, in case of a two-compartment device, pressure is first applied to the outer compartment to connect it with the inner compartment and mix the components contained in these compartments. The part of the device comprising the emptied
- 10 compartment is then folded upon the other compartments such that the compartments contact each other at the side of the cover sheet 12. By exerting pressure on the other compartment after mixing the components, the passage between the pocket and the adjacent compartment is opened and the mixed substance is dispensed through the cannula. Alternatively, both compartments may be pressed empty simultaneously. An additional mixing effect can be achieved by exerting
- 15 pressure alternately on the compartments after the pre-defined break zone between the compartments has been opened and before the pre-defined break zone to the pocket has been opened.

- According to a further preferred embodiment, locking means, e.g., brackets or clips, are provided
- 20 that prevent that the one compartment being folded on the other compartment moves back to its original position. In other words, the locking means keeps the compartments close to each other at or after dispensing of the substance.

## Claims:

1. A device for storing and dispensing a flowable substance, comprising:  
a container comprising  
5        a base member and a cover member being sealingly connected with each other  
         along the circumference of the container,  
         at least one compartment for receiving said substance, and  
         an open ended pocket area into which said substance is transferable from said at  
         least one compartment, and  
10        a cannula having an internal passageway being in a fluid communication with said pocket  
         for dispensing said substance.
2. The device of claim 1, said cannula being a separate component having a first end and a  
second end, said first end being associated with said open end of said pocket area.
- 15        3. The device of claim 2, wherein said first end comprises an extension part having a portion  
         with an increased cross-section.
4. The device of claim 3, said extension part having a cross-sectional shape comprising sharp  
20        edges in the plane between the base member and the cover member, and preferably  
         comprises a rhombical or fin-like cross-sectional shape.
5. The device of claim 2, wherein said extension part comprises at least one portion having an  
increased diameter.
- 25        6. The device of claim 2, wherein said extension part comprises a portion being tapered along  
         the length thereof, with the thickness of the tapered portion decreasing towards said first  
         end.
- 30        7. The device of claim 6, wherein said tapered portion comprises an U-shaped sealing area on  
         each of the opposing surfaces of said tapered portion, the legs of said U-shaped sealing  
         areas extending towards said first end and being connected at the edge of said first end.



8. The device of any of claims 2 to 7, wherein said first end is attached to said open ended pocket area by means of a heat seal, a press fit, and/or an adhesive.

9. The device of claim 1, said cannula being integrally formed with said base member.

5

10. The device of claim 1, said cannula being attached to said cover member, whereby said fluid communication with said pocket is established through said cover member.

10

11. The device of any of claims 1 to 10, wherein said cannula comprises a dosing means having a variable volume, preferably a bellow.

12. The device of any of claims 1 to 11, wherein said cannula further comprises an applicator at said second end for applying said substance to a treatment area.

15

13. The device of claim 12, wherein said applicator comprises bristles being integrally formed with said second end of said cannula, or comprises a foamed material, a non-woven material, or a plurality of fibres incorporated into said second end of said cannula.

20

14. The device of any of claims 1 to 13, wherein said internal passageway of said cannula further comprises flow resistors, preferably formed by structured surfaces, constricted portions, and/or orifices.

15. The device of any of claims 3 to 8, said extension part further comprising stiffening elements extending away from said extension part.

25

16. The device of any of claims 1 to 15, said base member being formed as a sheet.

17. The device of claim 16, said base member sheet being a deep-drawn sheet formed of a polypropylene layer, an aluminum layer, and a polyethylene layer.

30

18. The device of any of claims 1 to 15, said cover member being formed as a sheet, preferably being formed of a polyethylene terephthalate layer, an aluminum layer, and a polyethylene layer.

19. The device of any of claims 1 to 15, said cover member being formed as a plastic part, preferably as an injection moulded part.
- 5 20. The device of any of claims 1 to 19, further comprising a portion separating said compartment from said pocket, said separating portion comprising a passage area adapted to be selectively opened by pressure effective on said passage area for placing said compartment in communication with said pocket.
- 10 19. The device of any of claims 1 to 20, comprising two or more compartments for holding different substances, and a passage area adapted to be selectively opened for placing said compartments in communication with each other prior to dispensing the mixed final substance.
- 15 20. The device of any of claims 1 to 19, said cannula further comprising mixing means.
21. The device of claim 20, said mixing means comprising mixing helixes or elements providing flow resistance.
22. The device of any of claims 1 to 21, further comprising a handle.
- 20 23. The device of any of claims 1 to 22, wherein the container is pre-filled.
24. Set comprising a device according to any of claims 1 to 23 and a separate applicator.
- 25 25. Set comprising a plurality juxtaposed devices according to any of claims 1 to 23.
26. Set according to claim 25, further comprising a separate applicator.
- 30 27. Set according to claim 25 or 26, wherein at least one device is filled with a different substance than the other devices.

## Abstract

24. Okt. 2003

## Device for storing and dispensing a flowable substance

- 5 The present invention relates to a device for storing and dispensing a flowable substance. The device comprises a container comprising a base member and a cover member being sealingly connected with each other along the circumference of the container, a compartment for receiving the substance, and an open ended pocket area into which the substance is transferable from the compartment, and a cannula having an internal passageway being in fluid communication with
- 10 the pocket for dispensing the substance.

24. Okt. 2003

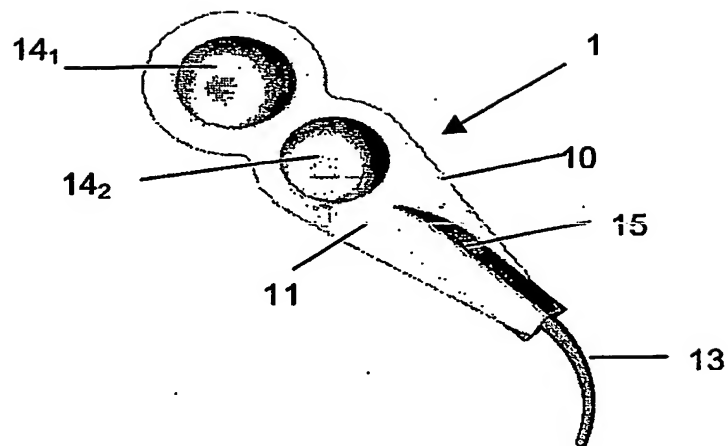


Fig. 1

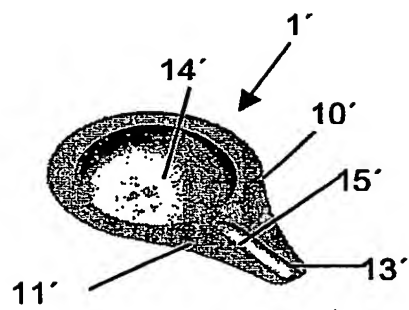


Fig. 2A

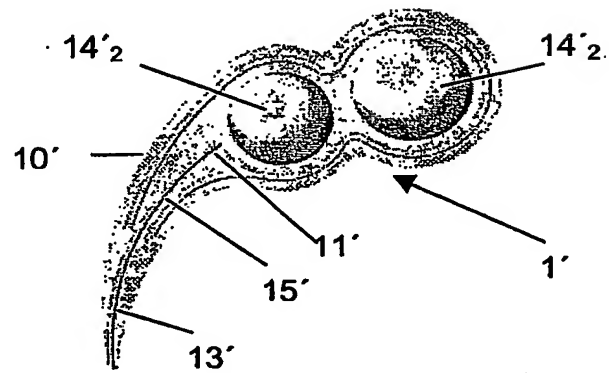


Fig. 2B

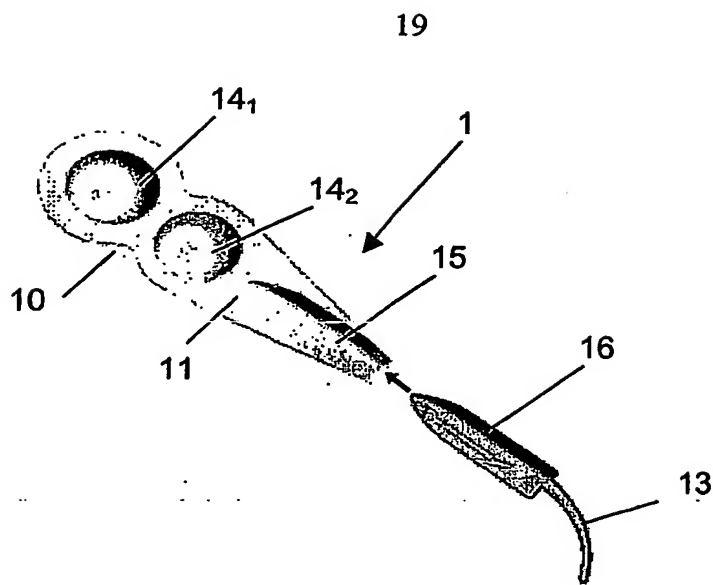


Fig. 3

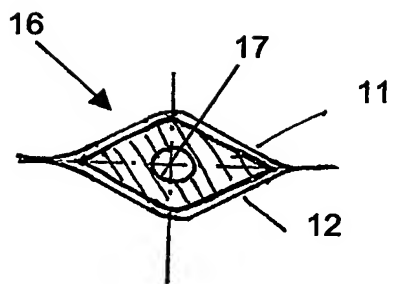


Fig. 4

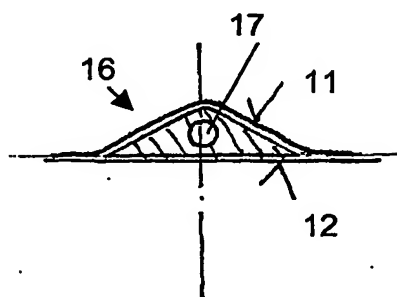


Fig. 5

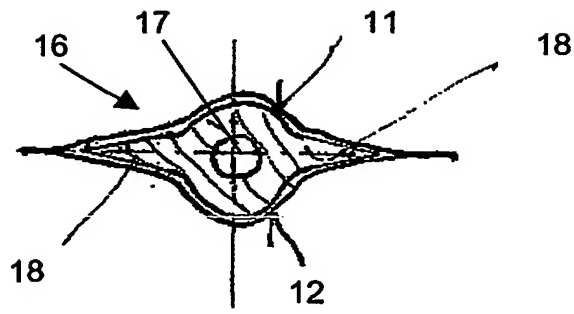


Fig. 6A

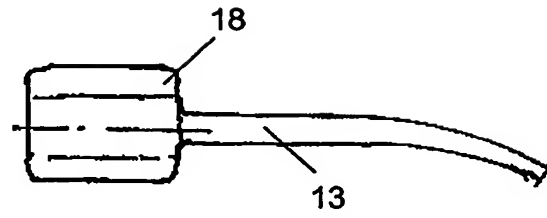


Fig. 6B

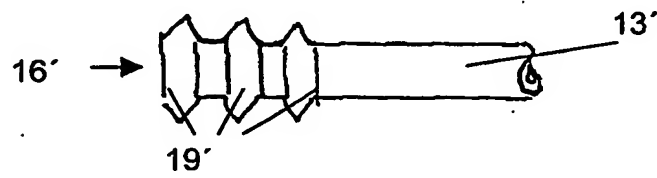


Fig. 7

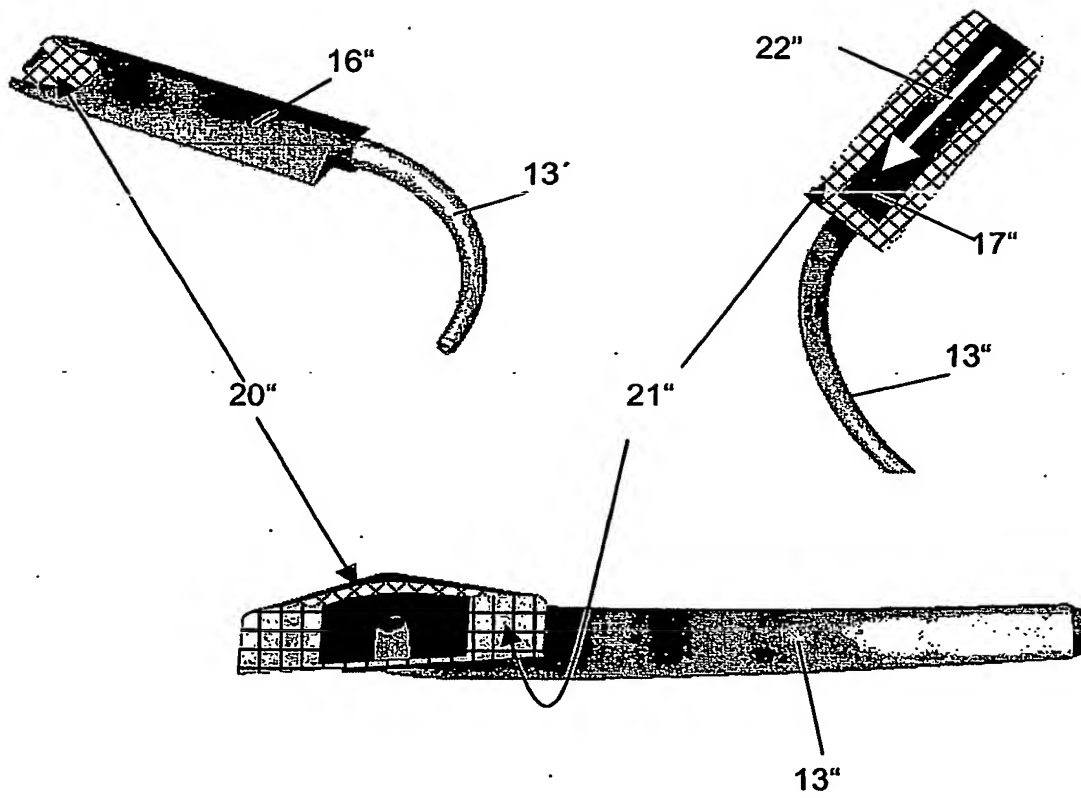


Fig. 8

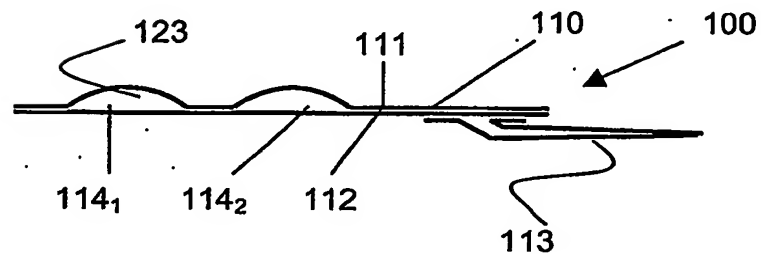


Fig. 9

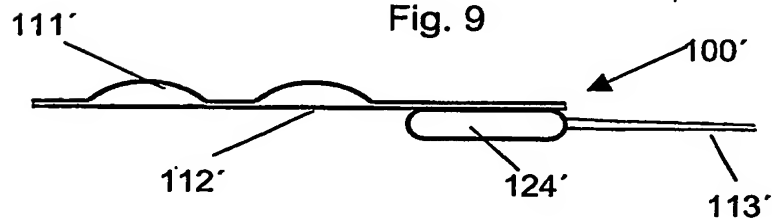


Fig. 10

22

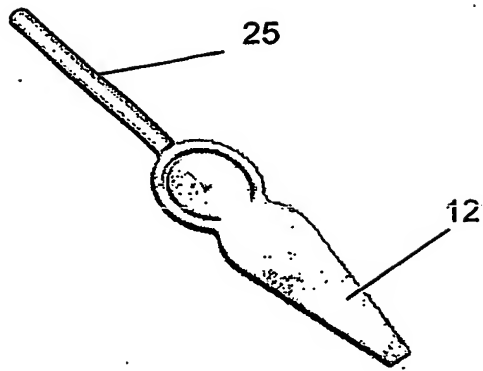


Fig. 11

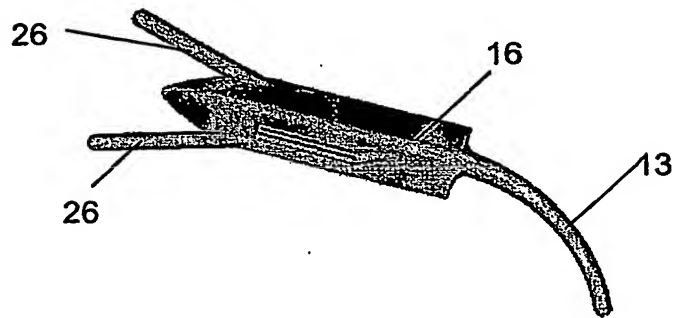


Fig. 12

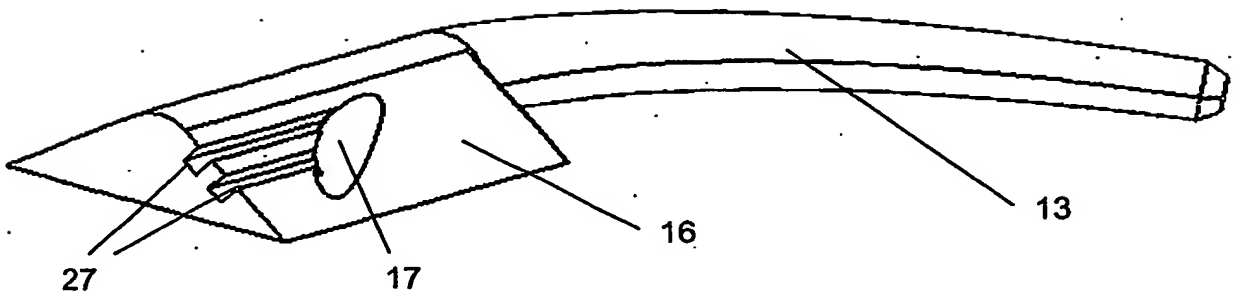


Fig. 13





Fig. 14

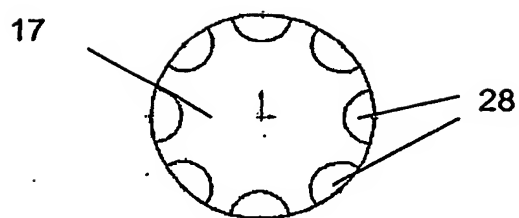


Fig. 15

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☒ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**